

LED Rail Reflector
337201 - 1 20W - Specification Sheet

Material:	Aluminium
Painting:	Highly pure powder coating
System power (W):	20W
Fixture lumen output (lm):	2000
System efficiency (lm/W):	100
Light source:	LED Cob
Power:	20W
CCT:	3000K/4000K
CRI:	>90
Input voltage:	AC 220-240V
Beam Angle:	150°/24°/36°
Surface Color:	White, Black, Silver
Net Weight:	0.86kg
QTY/CTN:	18PCS




White/Black/Silver


Description

Description:
Track light made of die-cast aluminium; surface powder coated in white, black or silver; COB (Chip on Board) technology for maximum efficiency; no multiple shadows; energy-efficient LEDs with very good colour rendering; binning initial ≤ 3 MacAdam; available in the light colours 3000K and 4000K; CRI ≥ 90 ; min. 80 % of the luminous flux after 50000 hours; BO 70 BASIC; high quality aluminium reflector with spherical facet finish; high-gloss anodised; precise radiation characteristic with four different beam angles installed and exchanged without tools; adapter for toolless insertion or movement on a variety of 3-phase power tracks; optional DALI

Size drawing

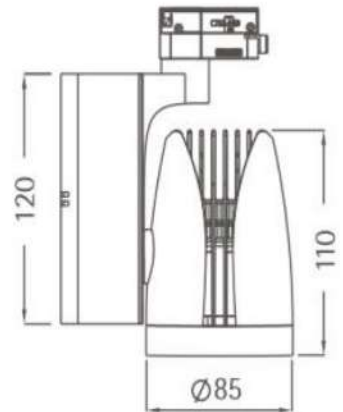

Photometric data

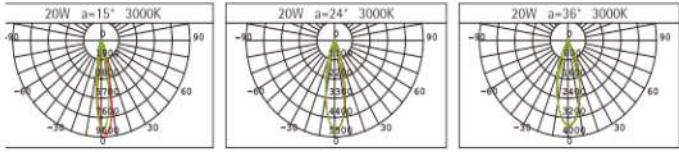

20W 15°				20W 24°				20W 36°		
Lux				Lux				Lux		
h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em	E _{max}	h(m)	d(m)	Em
1	0.3	6223	9208	1	0.45	3543	5121	1	0.61	2330
2	0.59	1556	2302	2	0.91	886	1280	2	1.21	583
3	0.89	692	1023	3	1.36	394	569	3	1.82	259



Application

