

**LED Outdoor Lamp
JM 040 GU 10 Underground Light - Specification Sheet**

Material:	SS316 collar + 6063 Aluminium body
Dimensions(mm):	Φ120x88mm
Hole size:	Φ105x145mm
PC housing size:	Φ102x135mm
Net weight:	0,83kg
Socket:	GU 10
Cable:	50cm rubber cable with VDE certificated, 3x0.75 sqmm, cable OD 7.0
IP grade:	IP 67, IK 08
Case:	Black PC included
Surface color:	Gray
Warranty:	3 years



Gray


Instructions

This fitting is supplied with a GU10 lampholder.

The GU10 luminaire is to be connected directly to a Mains Voltage supply.

1. Remove the two Allen key screws which retains the stainless steel ring to the Plastic base.
2. Take out the body.
3. Remove the four hexagon nuts which retains the stainless steel ring to the body.
4. Remove the bezel and glass. Install a LED GU10 lamp.
5. Check that the top of the luminaire is clean and correctly place the glass fitted with the seal to the fitting and fix the four Allen Key screws with hexagon nuts ."
6. Place the Plastic base in the ground, ensuring adequate drainage. Recommended 200mm minimum.
7. Make wiring using IP68 quick connectors (not supplied).
8. Insert the lighting fitting into the plastic base.
9. Fix the two Allen key screws and tighten them to the plastic base.
10. Restore power supply, switch on and test for satisfactory operation.

Maximum bulb size

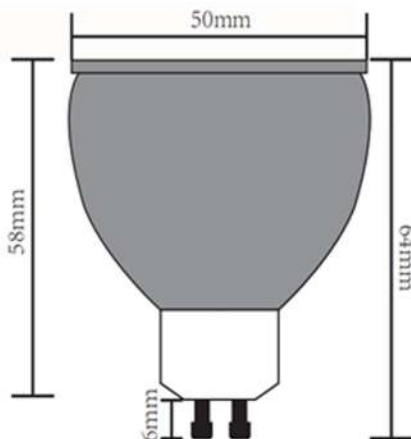

Size drawing

