


**LED Magnetic Lamp
11 / 20W - Specification Sheet**


| | |
|--------------------|-------------------------|
| Material: | Aluminum+Acrylic |
| Dimensions(mm): | Φ55*180mm |
| Input voltage: | 48V |
| Wattage: | 20W |
| Function: | Bluetooth dimming |
| Color temperature: | 3000K |
| LED: | COB |
| CRI: | >90 |
| Power factor: | >0.9 |
| Driver: | 48V |
| Lifetime: | 30000h |
| IP grade: | IP 20 |
| Beam angle: | 24° |
| Surface color: | Sandy white/Sandy black |



 S White/S Black

Photometric data

| DATA OF LAMP | | PHOTOMETRIC DATA Eff: 39.17 lm/W | | | |
|-------------------|-----------|----------------------------------|--------|---------------------|----------|
| MODEL | LED11-20W | I _{max} (cd) | 2117 | S/ME (C0/180) | 0.43 |
| NOMINAL POWER(W) | 20 | LOR(%) | 34.6 | S/ME (C90/270) | 0.46 |
| RATED VOLTAGE (V) | 48 | TOTAL FLUX(lm) | 630.54 | η UP, DN (C0-180) | 0.0,17.9 |
| NOMINAL FLUX(lm) | 1823.25 | CIE CLASS | DIRECT | η UP, DN (C180-360) | 0.0,16.7 |
| LAMPS INSIDE | 1 | η up (%) | 0.0 | CIBSE SHR NOM | 0.50 |
| TEST VOLTAGE (V) | 48 | η down (%) | 34.6 | CIBSE SHR MAX | 0.50 |

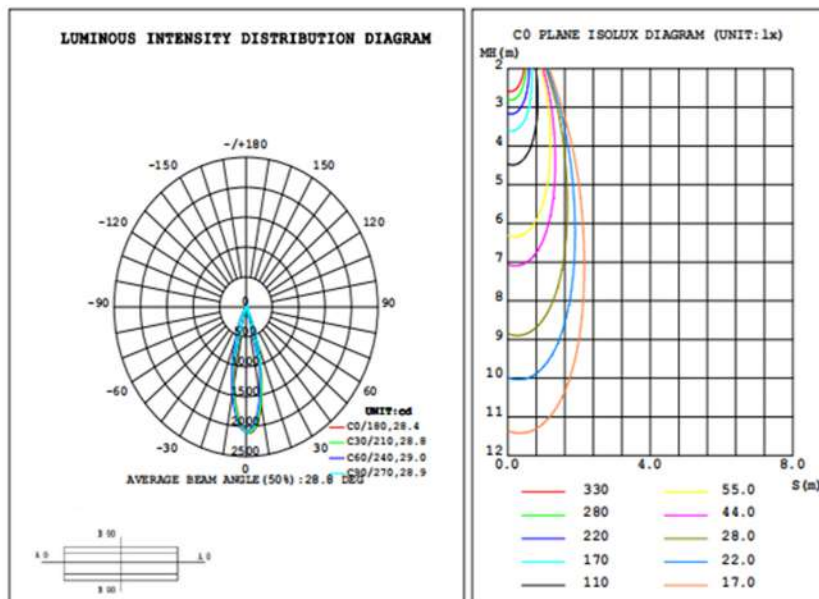

Size drawing

